

Code ES602SS – 60cm Slide Out Rangehood



FEATURES

- Stainless steel front fascia
- 2 speed motor
- 440m³ / hr extraction capacity
- Automatic light function
- Integrated front panel
- Dishwasher safe cassette filter
- Non visible controls system
- New smooth railing system
- 120mm Airflow outlet

2 SPEED MOTOR

This rangehood provides the option of 2 different speed levels ensuring you have the option to use your range hood at a low or high level of operation.

HIGH EXTRACTION CAPACITY

The extraction capacity of 440m³/hr provides strength and power to this stylish rangehood.

DISHWASHER SAFE CASSETTE FILTERS

The cassette filters can be placed in a dishwasher for easy cleaning and can easily be removed, re-connected from the range hood.

DECIBEL RATING

48-56 dBA

TIPS FOR BETTER USE

- To remove all odors, steam etc. leave your range hood on for 15 minutes after the cooking of the food
- The dishwasher-safe cassette filters need to be cleaned after approximately 2 months of standard operation
- It is recommended the range hood be installed between 650mm and 750mm above the cook top
- It is also recommended that fumes from the range hood be ducted out into the atmosphere.
- To ensure safe and effective cleaning turn off the range hood before attempting to clean

-Installation recommended by qualified installer.

Air Extraction



ELECTRICAL REQUIREMENT:

Range hood is supplied with 10amp cord & plug.

OPTIONAL ACCESSORIES

RECIRCULATING ACCESSORIES

Carbon Filter Code: CF110 (Requires x2)

** Please NOTE this still needs to be vented through cupboards

RANGEHOOD VENTILATION KITS

RHKE65 – Wall – Eave vent kit

RHKMR65 – Universal metal roof kit, includes flashing


RHKTR65 – Universal tile roof kit, includes flashing

FILTER CLEANING INFORMATION:

Cassette mesh filter : requires cleaning monthly.

This will ensure no interruptions with airflow operation.

PRODUCT DIMENSIONS

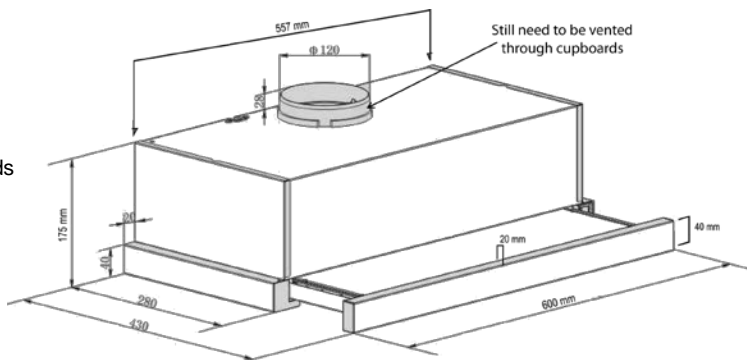

bringing european quality to your home